



FMAX312

TRIPLE DUAL WHEEL GOOSENECK

With up to a 40,000lb GVWR, 18" Engineered Beam frame, and 9,000lb curb weight, the FMAX312 is indisputably the king of the road.

30,000 lb GVWR

Available Sizes: 25' x 102", 28' x 102", 30' x 102"
32' x 102", 35' x 102", 38' x 102", 40' x 102", 44' x 102"

STANDARD FEATURES

LOADING STYLE: 12' Hydraulic Dovetail, Max Ramps, XDR Ramps, or Straight Deck

AXLES: 3 - 12,000 lb Heavy Duty, Oil Bath

COUPLER: 30,000 lb Bulldog BX1

CROSS-MEMBERS: 3" I-Beam on 16" Centers with Formed Gussets

FRAME: 16" Engineered Beam 2.0 20' - 32'
18" Engineered Beam 2.0 35' - 44'

JACK: 2 - 12,000 lb Drop-Leg Jacks

NECK: 12" Engineered Neck


STAKE POCKETS: 2" x 3/8" Rub Rail with Stake Pockets and Pipe Spools

STORAGE: Diamond Plate Neck Box with Gas Shock Assisted Lid

SWAY CONTROL: Standard on 30' - 44' models

TIRES: ST235/80R16 Radial, Dually

DM POWDER COAT

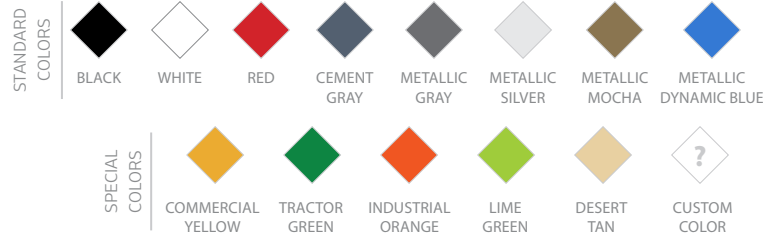

AVAILABLE WHEELS



BLACK

POPULAR UPGRADES

40,000 lb GVWR Package

Electric-Over-Hydraulic Disc Brakes

Blackwood Floor

2 - 25,000 lb Two Speed Drop-Leg Jacks

7' x 8' Weld-On/Bolt-On Deck on the Neck

14" x 14" x 36" Under-Slung Box

Air Ride Suspension

ST215/75R17.5 Radial Dually Tires